

Remote Post Installation Instructions



The power of control. Automated.

Directions

WARNING! Before beginning the installation process, it is important to read this document in its entirety. In addition, please be sure to follow correct safety procedures, including wearing all appropriate safety equipment such as safety glasses.




- 1 Choose the location for the remote post. For surface mounting, place the u-shaped mounting bracket in the location the post will be mounted and use the holes in the bracket as a template to mark for drilling. Double-check the orientation of the remote post before drilling. For core mounting insert post down into wet concrete and brace until concrete cures.
- 2 Some disassembly and reassembly of the remote post may be required to mount miscellaneous components and route wires. Install these devices and create any necessary wire passageways before mounting the guide rail (optional) in its final position.
- 3 Use a 3/8" diameter drill bit and drill down approximately 2" deep for each of the anchors in the bracket.
- 4 Clean out the anchor holes. Position the bracket and tap the concrete anchors through the bracket and into the mounting holes until the washer contacts the surface of the bracket. When satisfied with the position of the post, tighten all fasteners securely.
- 5 Place the remote post over the bracket and align holes in the bracket with holes drilled in the remote post. Insert bolts through the post and into the bracket and tighten.
- 6 Attach the plastic cap by screwing it securely into position on the post using the screws provided.

Miscellaneous Component Installation

Larco offers remote posts capable of accommodating a variety of miscellaneous components, including:

- Wall switches
- Card readers and other security devices
- Guide rail/remote post combinations

Use the instructions above to mount the remote post and then follow the instructions included with the accessory component.

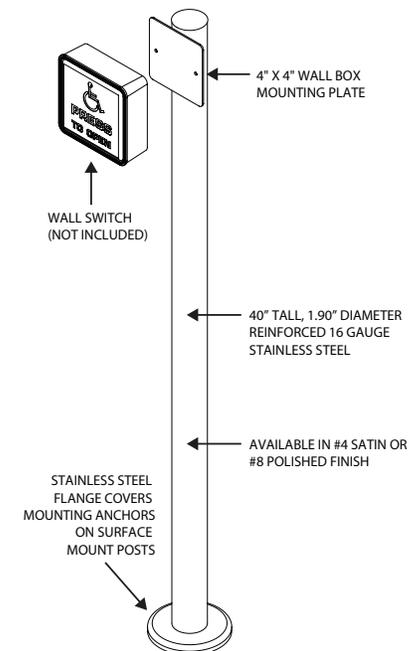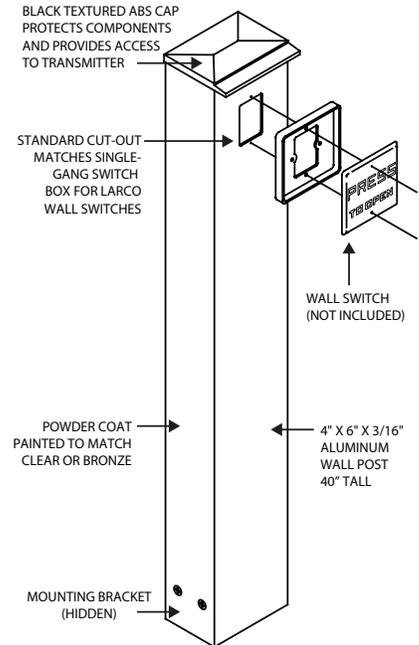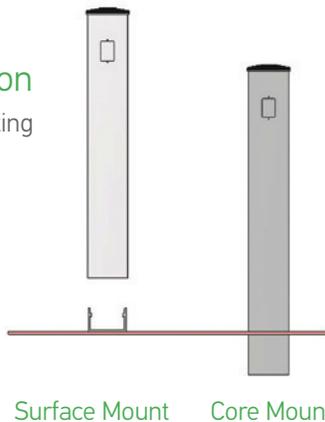

223-0127-000 Rev. C 5/19



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ATEK Access Technologies
10025 Valley View Road, Ste. 190
Eden Prairie, MN 55344 U.S.A.

PH: 1.800.523.6996
FAX: 1.800.589.3705
+1.218.829.9797

www.atekaccess.com



Access the power of technology.